


2 POWER PLAN
1/4"=1'-0"

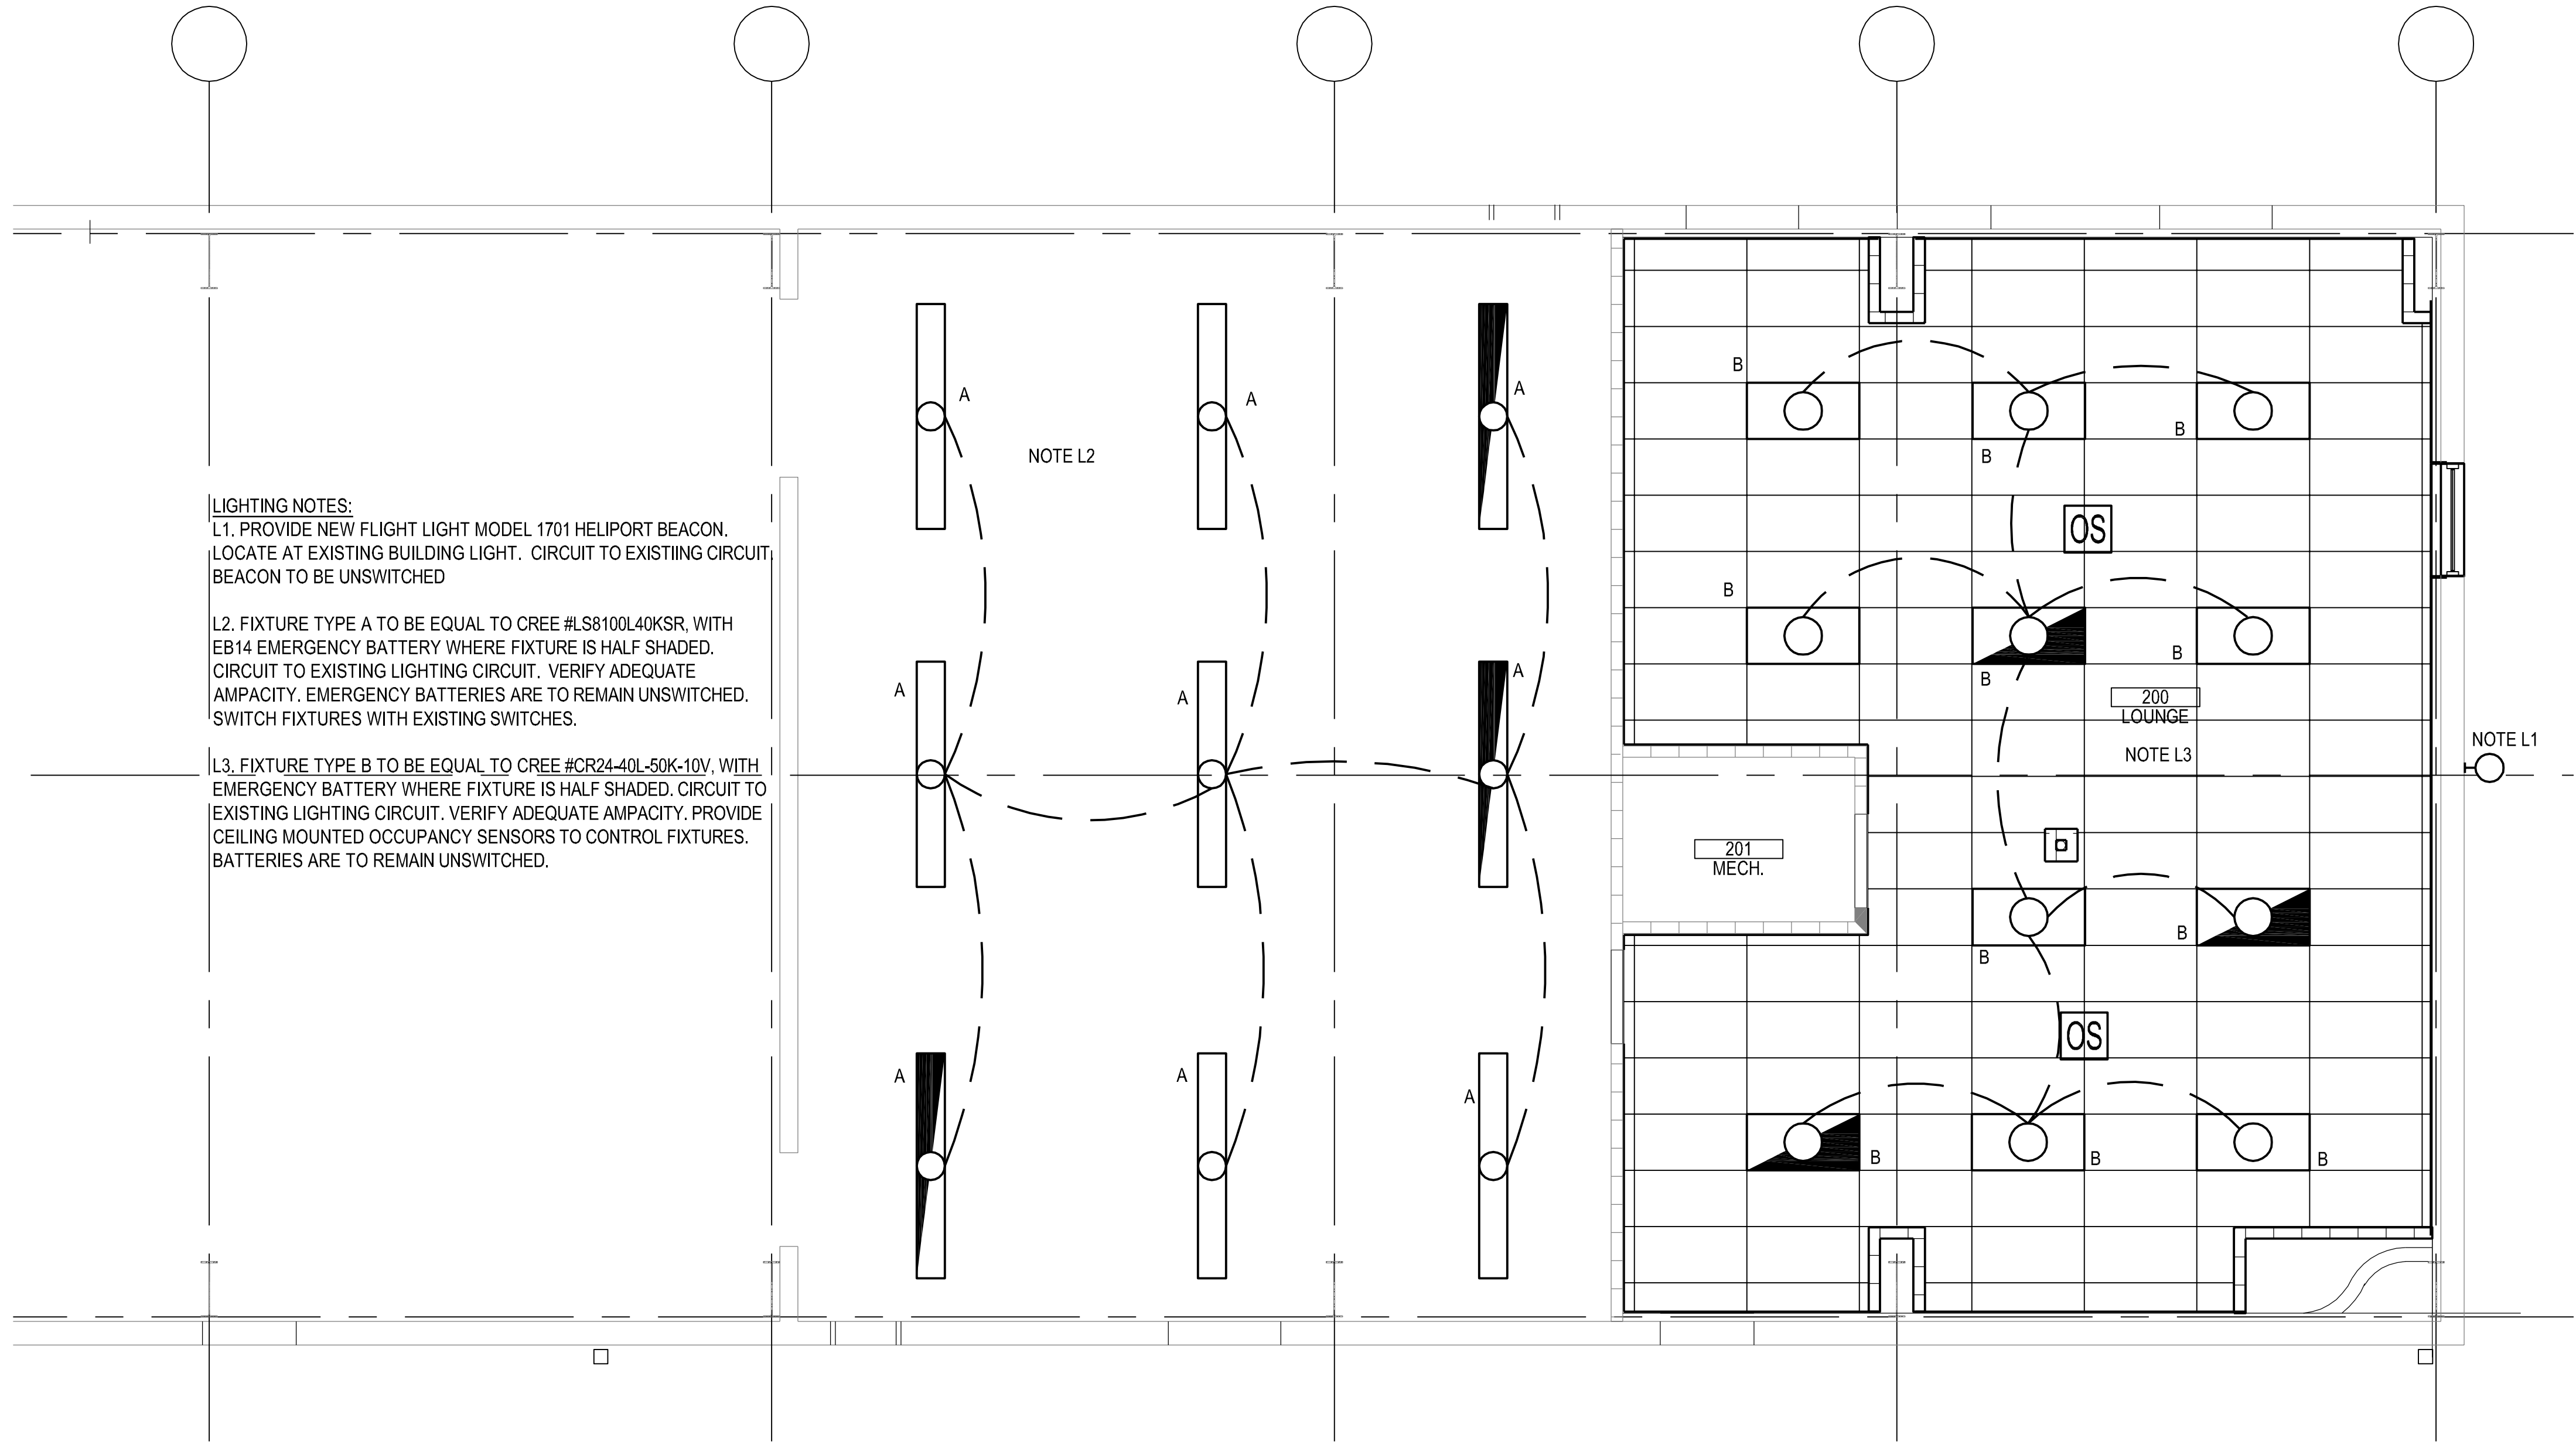

1 LIGHTING PLAN
1/4"=1'-0"

ELECTRICAL SYMBOLS

RECEPTACLES (MOUNTED 18" AFF UNLESS INDICATED OTHERWISE)

DUPLEX RECEPTACLE OUTLET (20A, 125V, 2 POLE, 3 WIRE, GROUNDING TYPE, NEMA 5-20R)

LIGHT FIXTURES

LIGHT FIXTURE, LED

LIGHT FIXTURE, LED WITH EMERGENCY SELF CONTAINED BATTERY PACK. BATTERY PACK IS TO REMAIN UNSWITCHED.

LIGHT FIXTURE, WALL MOUNTED.

LIGHT FIXTURE IDENTIFICATION

UPPER CASE LETTER BESIDE EACH FIXTURE
DENOTES FIXTURE TYPE.

SWITCHGEAR

ELECTRICAL PANELBOARD, FLUSH MOUNTED

SWITCHES (MOUNTED AT 48", UNLESS INDICATED OTHERWISE)

OCCUPANCY SENSOR, CEILING MOUNTED, COMBINATION ULTRASONIC AND PASSIVE INFRARED

SECURITY

CCTV CAMERA LOCATION


MISCELLANEOUS

CONDUIT RUN, EXPOSED

CONDUIT RUN, CONCEALED




FLEXIBLE CONDUIT

CIRCUIT INFORMATION

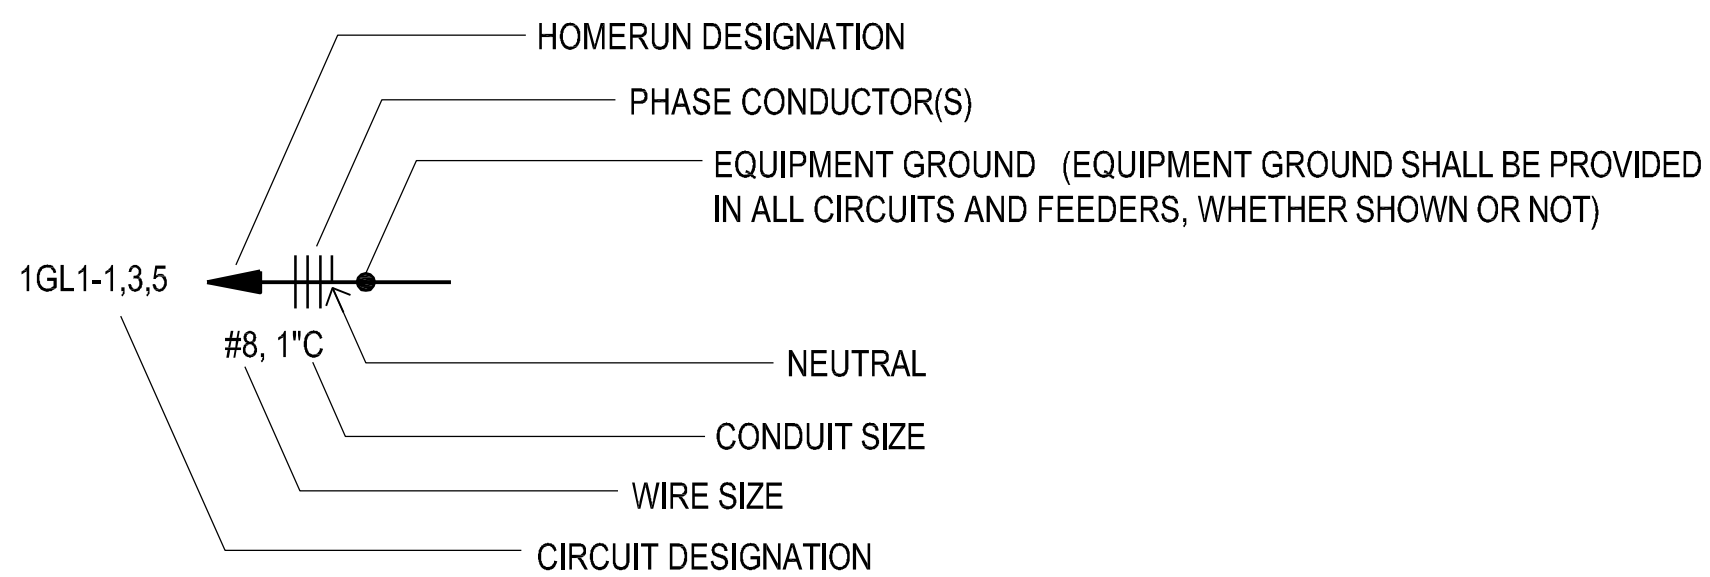

- CIRCUIT DESIGNATION INDICATES PANELBOARD AND CIRCUIT(S) TO WHICH HOMERUN IS CONNECTED.
- WIRE SIZE SHALL BE NO. 12, UNLESS INDICATED OTHERWISE.
- CONDUIT SIZE SHALL BE MINIMUM ALLOWED BY SPECIFICATIONS FOR NO. 12 SIZE WIRE, 3/4" FOR NO. 10, UNLESS INDICATED OTHERWISE.
- CIRCUIT INFORMATION PROVIDED AT THE HOMERUN SYMBOL SHALL APPLY THE ENTIRE LENGTH OF THE CIRCUIT (FROM PANELBOARD TO LAST LOAD).
- WHEN NO PHASE CONDUCTOR OR NEUTRAL IS INDICATED AT THE HOMERUN SYMBOL, PROVIDE ONE PHASE CONDUCTOR AND ONE NEUTRAL, BOTH NO. 12.
- SWITCHING CONDUCTORS, CONDUCTORS FOR NIGHT LIGHT CIRCUITS (UNSWITCHED), ETC. ARE NOT SHOWN, BUT SHALL BE PROVIDED AS NECESSARY.
- WIRE SIZE INDICATED ON THESE DOCUMENTS AS INDICATED BY "NO." OR "#" HAS THE SAME MEANING AS "AWG" (N.E.C. NOMENCLATURE). (I.e. "NO. 12" OR "#12" MEANS "12AWG" IN N.E.C. NOMENCLATURE.)

SCALE: 1/8" = 1'-0"

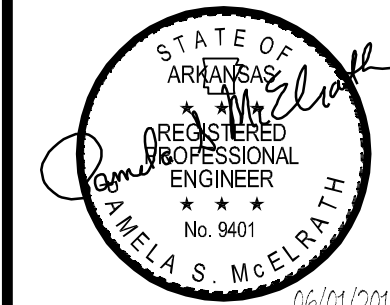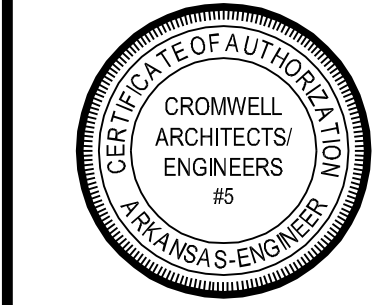

CONSTRUCTION DOCUMENTS

HELIPORT REMODEL
CITY OF LITTLE ROCK



CROMWELL

101 south spring street little rock, ar 72201
501.372.2900 cromwell.com

Issue Date 01-JUNE-2015 Project Number 2015-059

Drawing Title

ELECTRICAL
PLANS

Drawing Number

E-101